
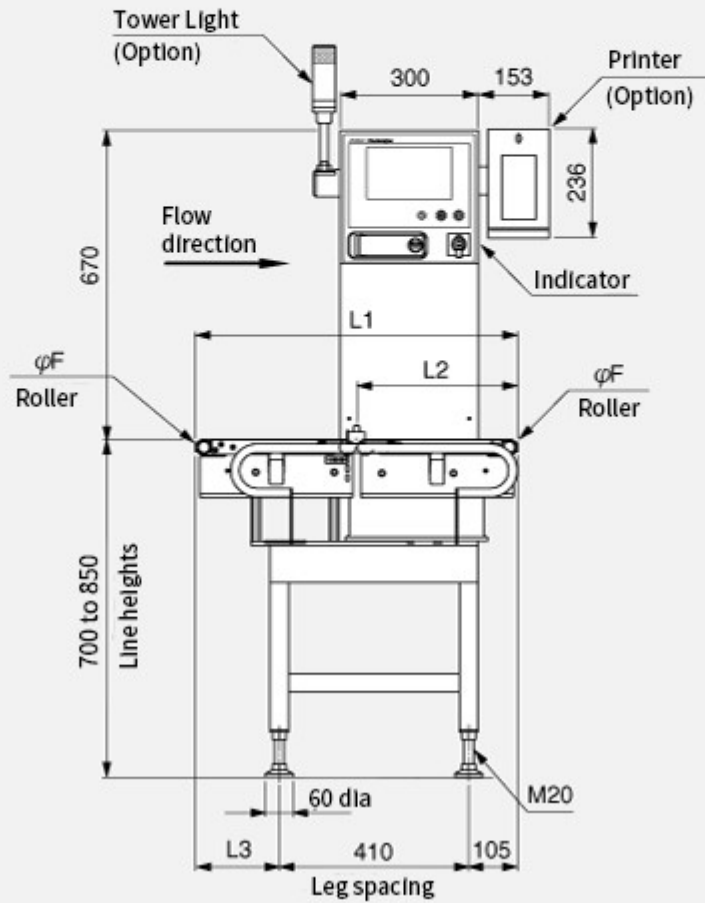


# KWS5366BW66

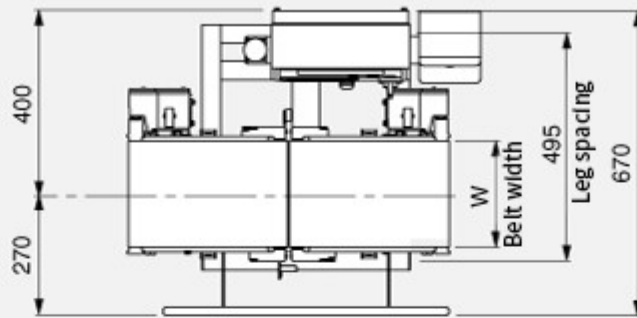

Units : mm

## ■ Specifications

Model	KWS5366BW66	
Weighing range	12 to 1200 g [12 to 600 g] <sup>3</sup>	
Scale interval	0.05 g	
Maximum speed <sup>1</sup>	220 [270] products/min	
Maximum accuracy(3 $\sigma$ ) <sup>1</sup>	+/- 0.2 g	
Display	8.5-inch color TFT LCD	
Operation method	Touch panel (Start, Stop, and Home are direct push buttons)	
Indication range	1204.5 g	
Preset memory	Maximum 200	
Classification	2 or 3	
Product size 2 <sup>2</sup>	Width W	20 to 230 mm
	Length L	60 to 320 mm
	Height H	5 to 320 mm
Belt speed	9 to 82 [9 to 97] m/min	
Power requirements	100 to 120 Vac +10% -15% or 200 to 240 Vac +10% -15%; single phase, 50/60 Hz, 300 VA, rush current 30 A (typ.) (20 ms or less)	
Mass	64 kg	
Environmental conditions	0° to 40° C (variation not to exceed 5° C/h to maintain accuracy), relative humidity 30% to 85% non-condensing	
Protection class	IP66 compliance	
Exterior	Stainless steel (SUS304)	
Data output	USB port (USB2.0), Ethernet interface (10BASE-T, 100BASE-TX)	

1: The speed and accuracy vary according to the products to be weighed and the rejector.

2: The size of products to be weighed depends on the rejector; select a checkweigher together with a rejector. Consult us about semi-transparent and transparent products.

3: [ ] are optional. The maximum weighing range varies according to the operating environment.

Note: The noise level of the checkweighers does not exceed 70 dB (A).

## Model Selection List

The SSV series is available in a variety of models to suit a wide range of products. For details of detection areas, please submit an online inquiry form.

(Water Proof model) SSV-i series

Model	Weighing range (g)	Maximum accuracy (g)	Maximum speed (products/min)	Belt speed (m/min)	Product size		
					Width (mm)	Length (mm)	Height (mm)
KWS 6265BW65	6 to 600	+/- 0.1	330	9 to 97	20 to 160	60 to 200	5 to 200
KWS 6366BW66	12 to 1200 [12 to 600]	+/- 0.2	220 [270]	9 to 82 [9 to 97]	20 to 230	60 to 320	5 to 320
KWS 6472BW72	30 to 3000 [30 to 1200]	+/- 0.1	160 [220]	7 to 60 [9 to 82]	20 to 230	76 to 320	5 to 320
KWS 5265BW65	6 to 600	+/- 0.2	330	9 to 97	20 to 160	60 to 200	5 to 200
KWS 5366BW66	12 to 1200 [12 to 600]	+/- 0.2	220 [270]	9 to 82 [9 to 97]	20 to 230	60 to 320	5 to 320
KWS 5472BW72	30 to 3000 [30 to 1200]	+/- 0.5	160 [220]	7 to 60 [9 to 82]	20 to 230	76 to 320	5 to 320
KWS 5476BW76	30 to 3000 [30 to 1200]	+/- 0.5	120 [155]	7 to 65 [9 to 83]	20 to 350	76 to 450	5 to 450
KWS 5677BW77	60 to 15000	+/- 2	70	5 to 38	20 to 350	76 to 450	5 to 450
KWS 5678BW77	60 to 15000 [60 to 3000]	+/- 2	50 [90]	5 to 36 [7 to 64]	20 to 350	76 to 600	5 to 600

The speed and accuracy vary according to the products to be weighed and the rejector.